


POLYURETHANE FOAM

CORRUGATED, WITH SELF ADHESIVE LAYER

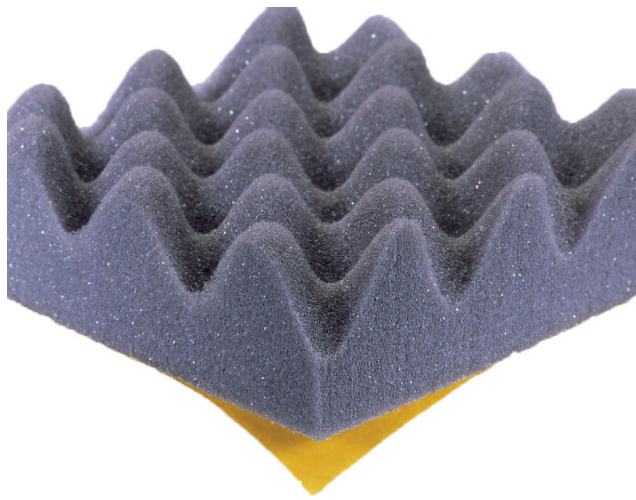

DESCRIPTION

50 mm of corrugated PU Ether absorption foam. **Self adhesive layer on one side.**
Temperature range : from - 25°C to + 110°C.
Fire resistance : M4.

APPLICATIONS

- Air conditioning
- Fans
- Ventilation shaft
- Pumps
- Presses
- Air compressors

DIMENSIONS

Reference	Length (mm)	Width (mm)	Thickness (mm)	Weight (kg)
841000	700	500	50	0,43
841010	2000	1400	50	3,44


Tolerance : ± 6 mm

ACOUSTIC PERFORMANCES

Average absorption factor K 65%.

Approximate gain on a 2 mm steel sheet : - 10 dB (A).

The corrugations increase the absorption surface by 40%.

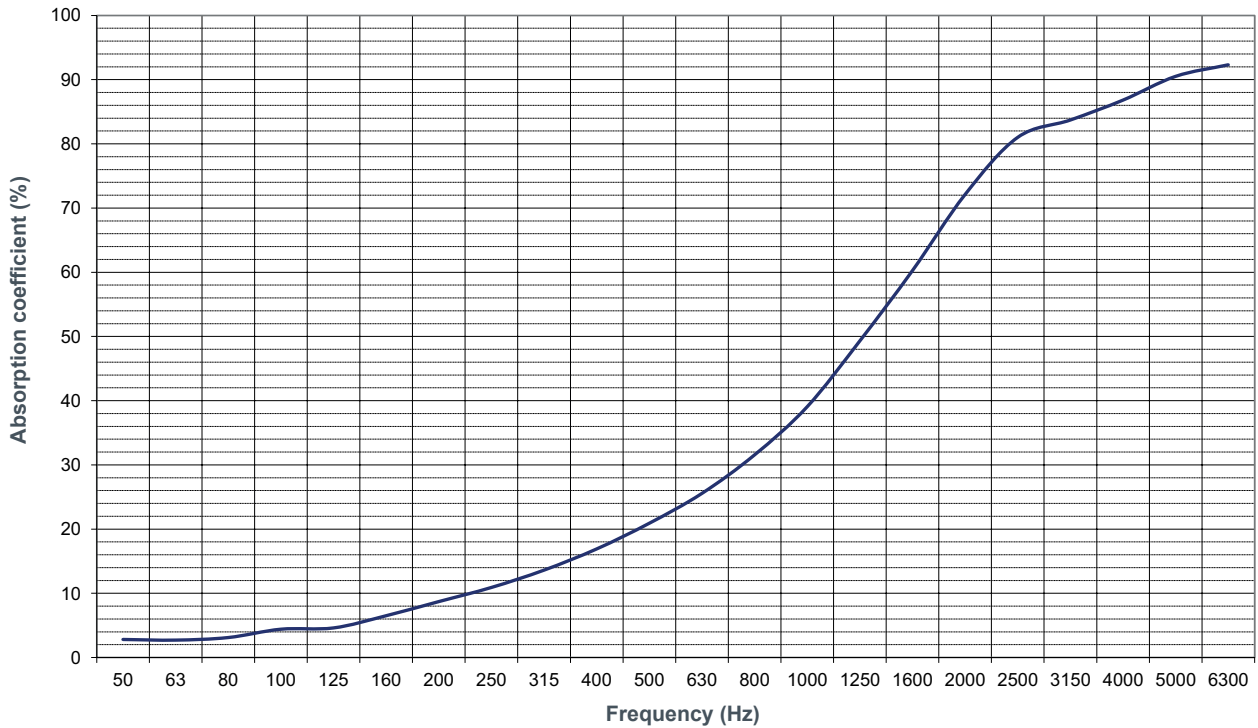

— 841000 and 841010

The measures are made with 3 Kundt's tubes of different diametres to adapt the ranges of frequencies. This experiments are made according to the NF EN ISO 10534-2 standards.